

# BYSTRONIC STYLE

**Gli utensili superiori e inferiori elencati in questa sezione possono essere installati sulle piegatrici Bystronic/Beyeler dotate dei seguenti stili di connessione:**

Bystronic/Beyeler Type RFA  
Bystronic/Beyeler Type RF  
Bystronic/Beyeler Type R

Questi utensili possono essere installati anche su altre piegatrici tramite adattatori superiori e inferiori.

***Upper and lower tooling listed on this section could be installed on the Bystronic/Beyeler press brakes equipped with the following clamping styles:***


*Bystronic/Beyeler Type RFA  
Bystronic/Beyeler Type RF  
Bystronic/Beyeler Type R*

*These tooling could also be installed on other press brakes by using the appropriate upper and lower adapters.*





2000  
**EUROSTAMP**  
the Italian excellence


FRAZIONATURA STANDARD  
STANDARD SEGMENTATION

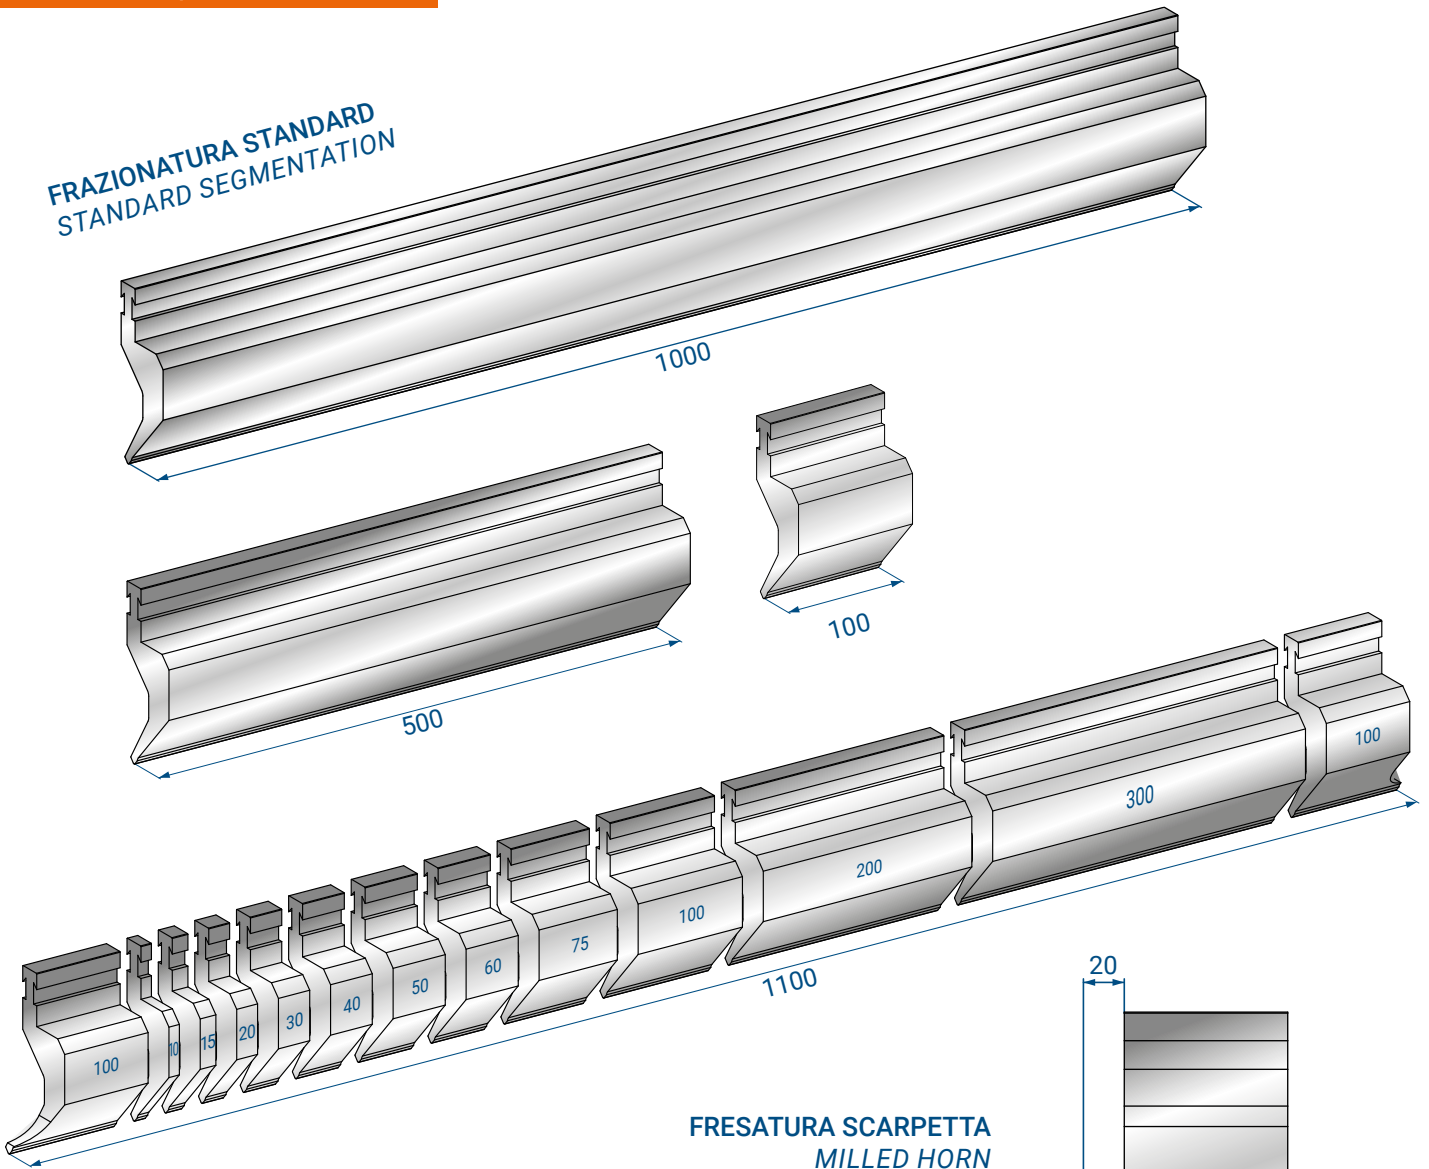

FRESATURA SCARPETTA  
MILLED HORN

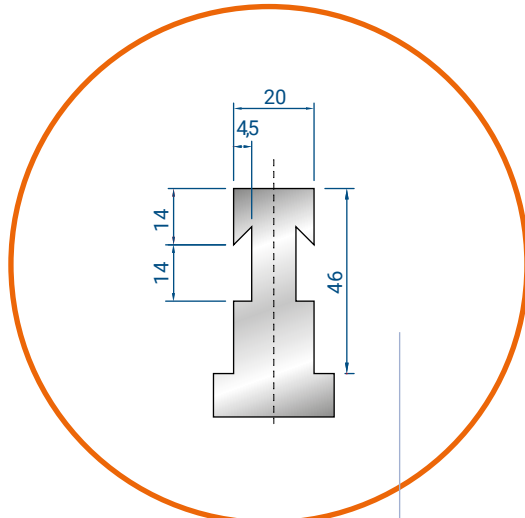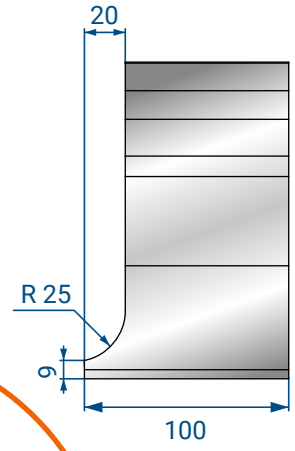

BYSTRONIC STYLE  
TYPE R

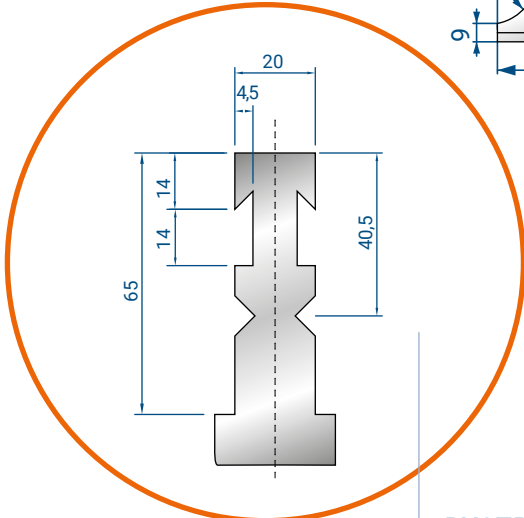


BYSTRONIC STYLE  
TYPE RF-A


INCLUSO SU RICHIESTA  
AVAILABLE ON DEMAND  
AT NO COST

CODICE / CODE **8022**


SCARPETTE SPECIALI  
SPECIAL HORNS

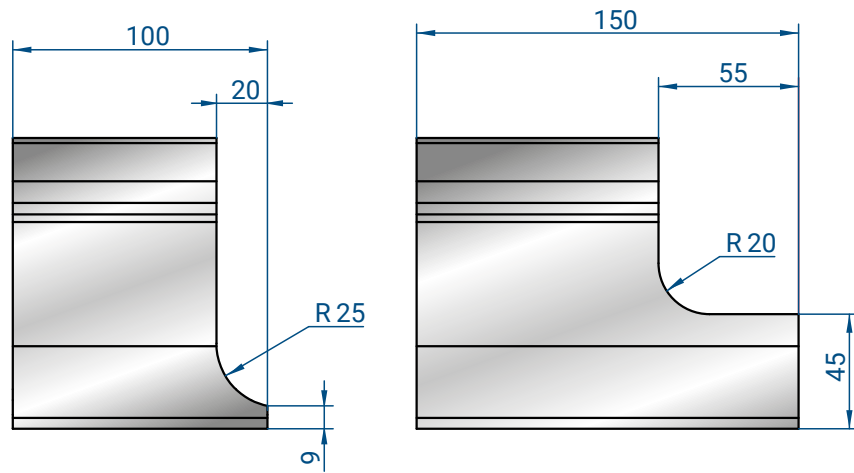


TAGLI A RICHIESTA  
SPECIAL SEGMENTATION

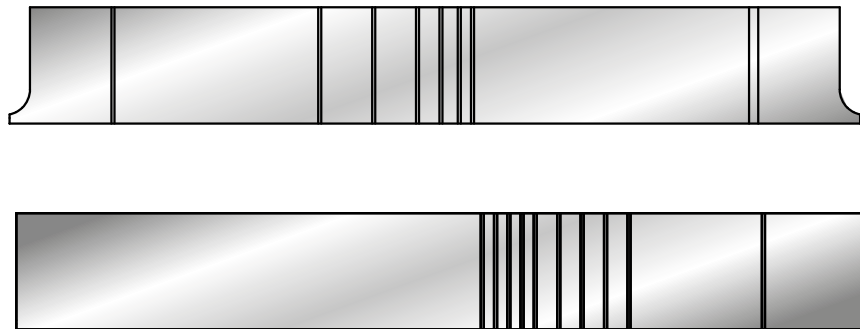

MODIFICA RAGGIO  
RADIUS MODIFICATION

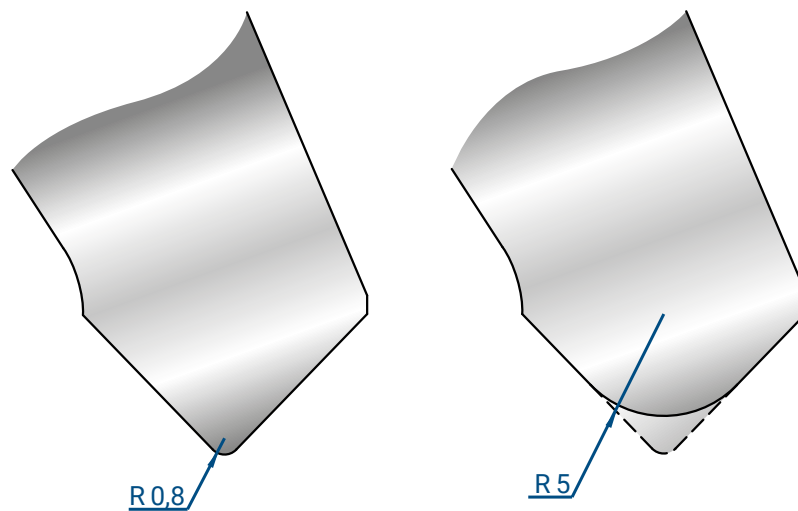


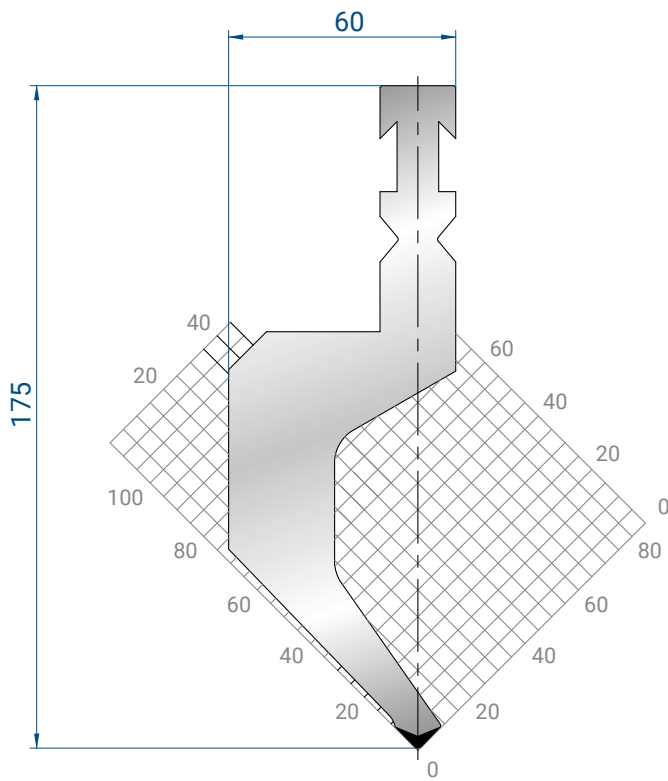

## 1227

**Mat** = C45  
 bonificato / *tempered*  
**H** = 175.00  
**Max T/m** = 50  
 $\alpha$  = 88°  
**R** = 1.5


1000 mm	33,0 kg
500 mm	16,0 kg
1100 mm FRAZ. / SECT.	33,0 kg
100 mm	3,2 kg

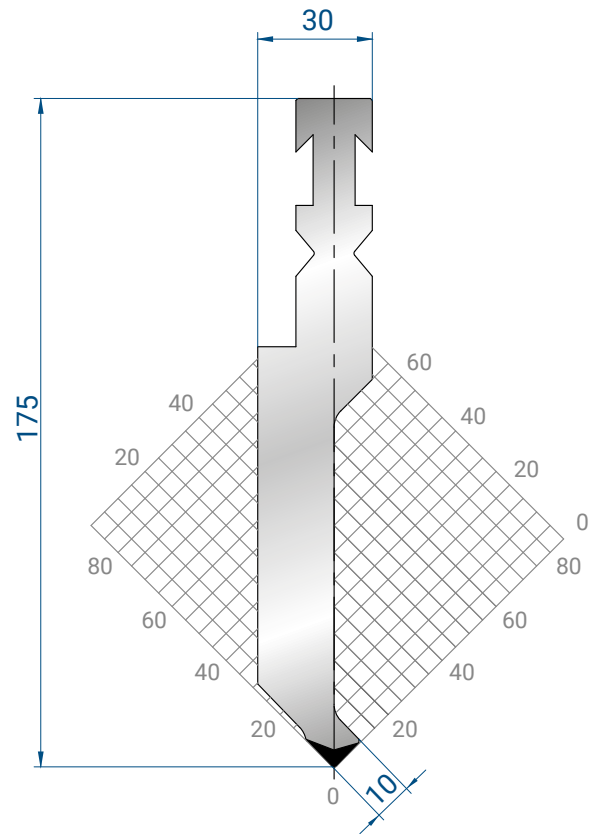


## 1229

**Mat** = C45  
 bonificato / *tempered*  
**H** = 175.00  
**Max T/m** = 100  
 $\alpha$  = 88°  
**R** = 1

1000 mm	26,0 kg
500 mm	13,0 kg
1100 mm FRAZ. / SECT.	26,0 kg
100 mm	2,6 kg

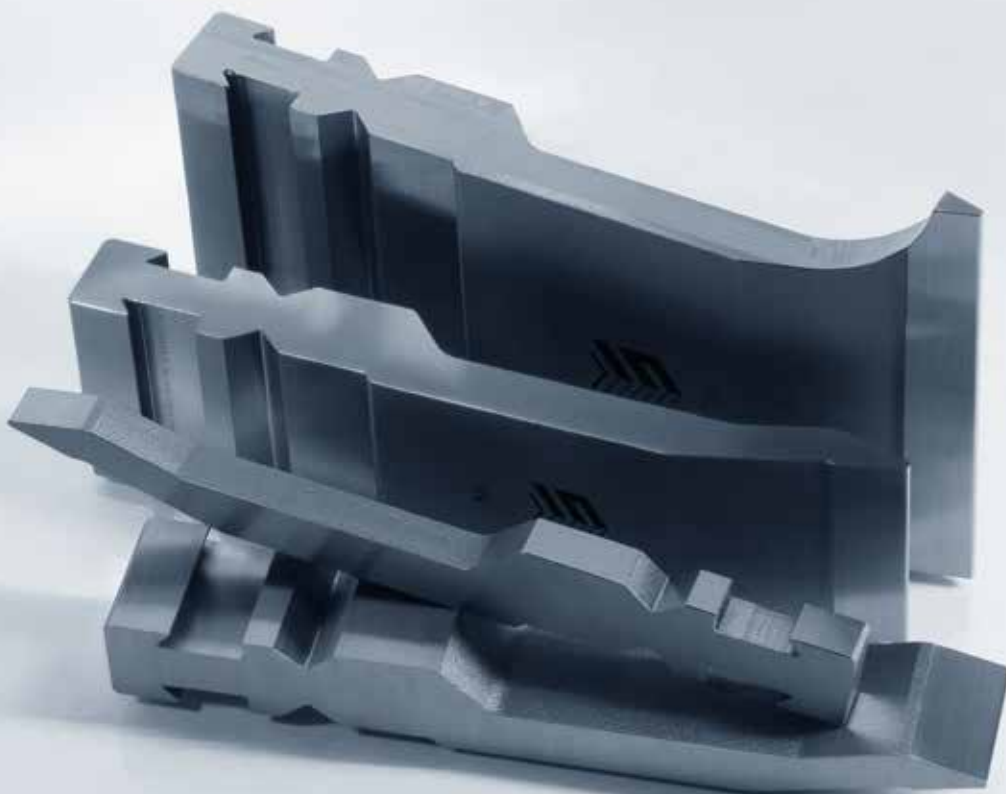


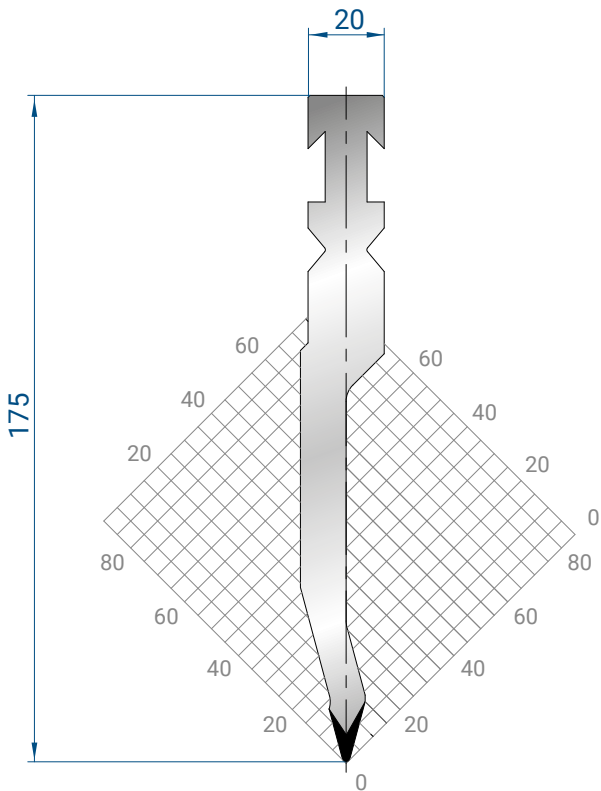

### 1230

Mat = C45  
 bonificato / *tempered*  
 H = 175.00  
 Max T/m = 80  
 $\alpha = 30^\circ$   
 R = 1


1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

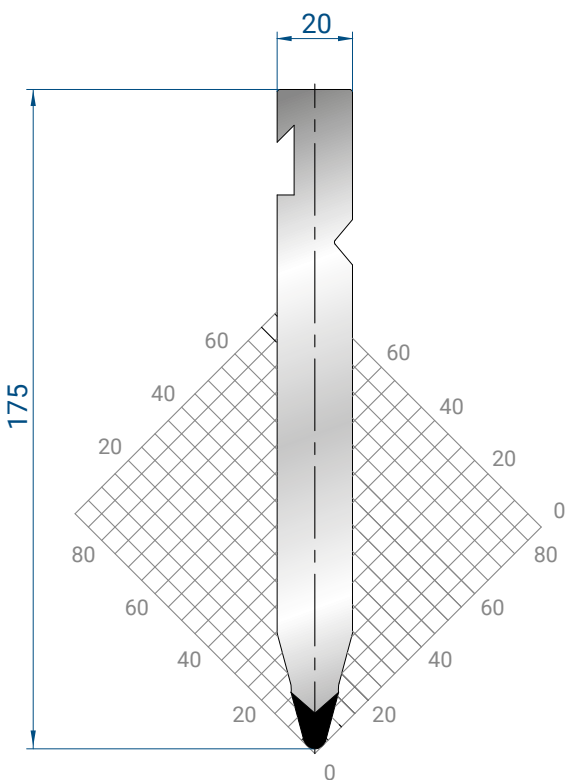

### 1231

Mat = C45  
 bonificato / *tempered*  
 H = 175.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 3

1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

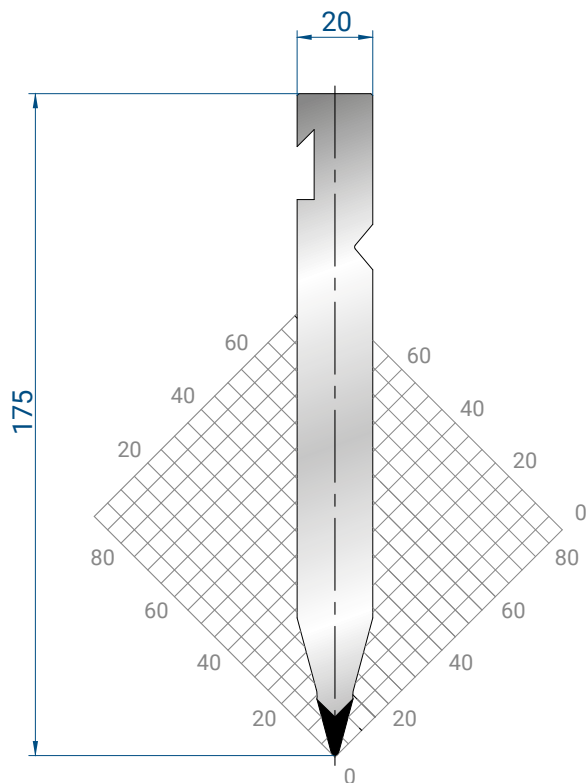

### 1232



Mat = C45  
 bonificato / *tempered*  
 H = 175.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 1

1000 mm	25,0 kg
500 mm	12,0 kg
1100 mm FRAZ. / SECT.	25,0 kg
100 mm	2,4 kg

# 1298

**Mat** = 42 CrMo4  
 bonificato / tempered  
**H** = 250.00  
**Max T/m** = 60  
 $\alpha$  = 86°  
**R** = 1.5

500 mm	25,0 kg
1100 mm FRAZ. / SECT.	55,0 kg
100 mm	5,0 kg

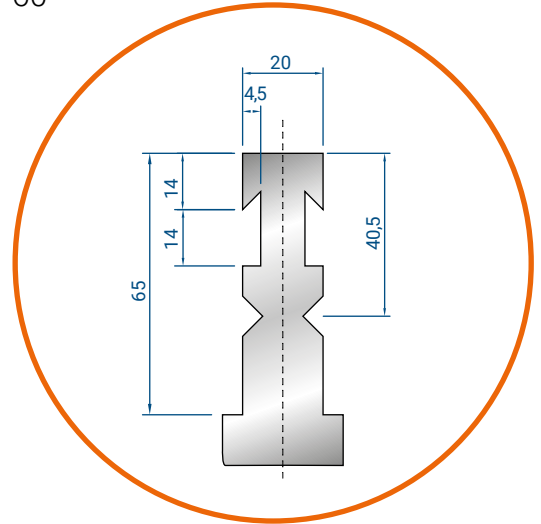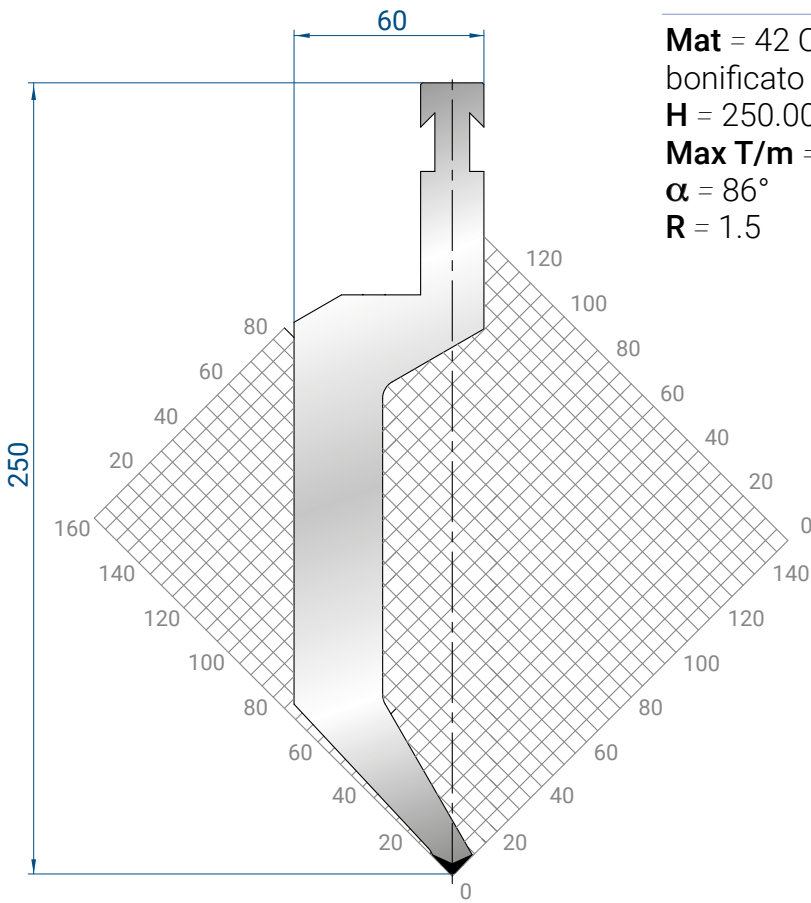


**ATTACCO / UPPER TANG RF-A**

INCLUSO SU RICHIESTA  
 AVAILABLE ON DEMAND  
 AT NO COST

**CODICE / CODE 8022**




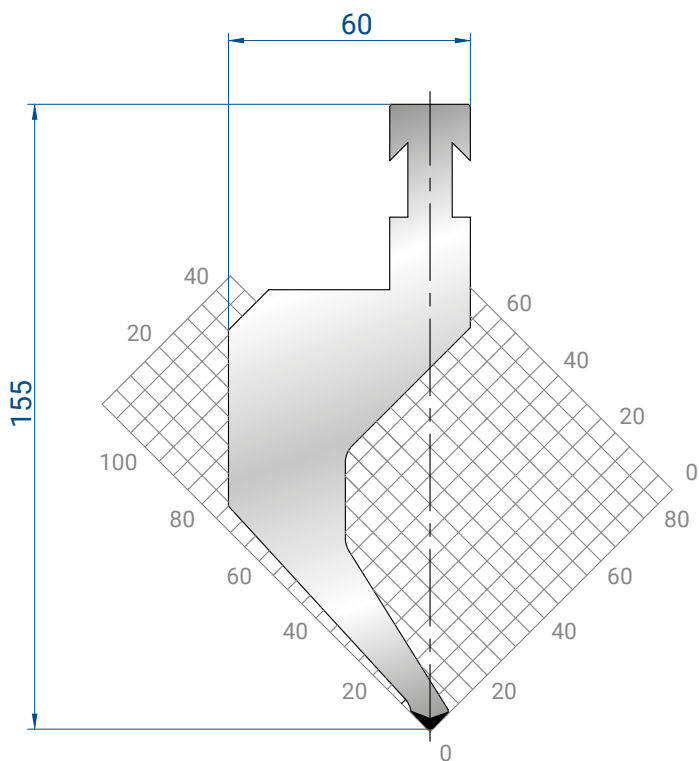

### 1216

**Mat** = C45  
 bonificato / *tempered*  
**H** = 155.00  
**Max T/m** = 50  
 $\alpha$  = 85°  
**R** = 1.5


1000 mm	23,0 kg
500 mm	12,5 kg
1100 mm FRAZ. / SECT.	30,0 kg
100 mm	3,0 kg

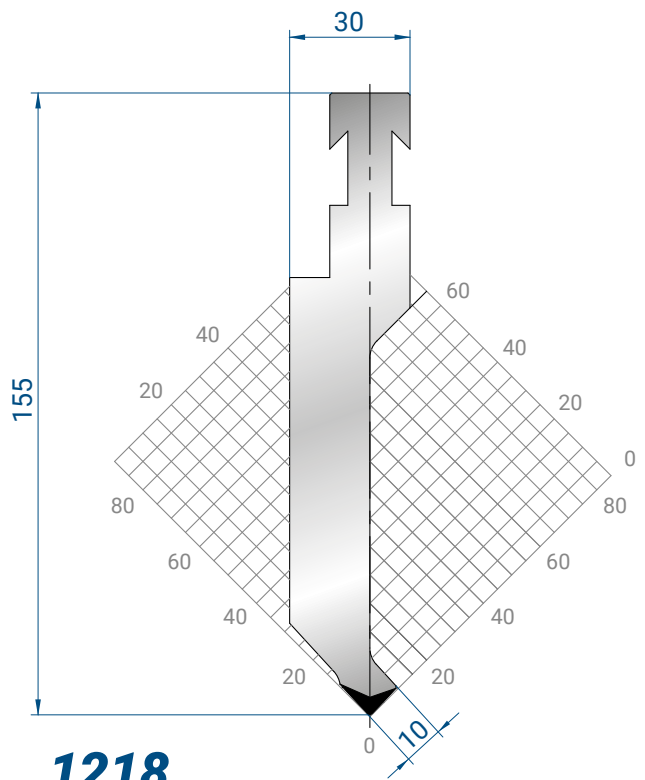

### 1218

**Mat** = C45  
 bonificato / *tempered*  
**H** = 155.00  
**Max T/m** = 100  
 $\alpha$  = 85°  
**R** = 1


1000 mm	30,0 kg
500 mm	15,0 kg
1100 mm FRAZ. / SECT.	30,0 kg
100 mm	3,0 kg

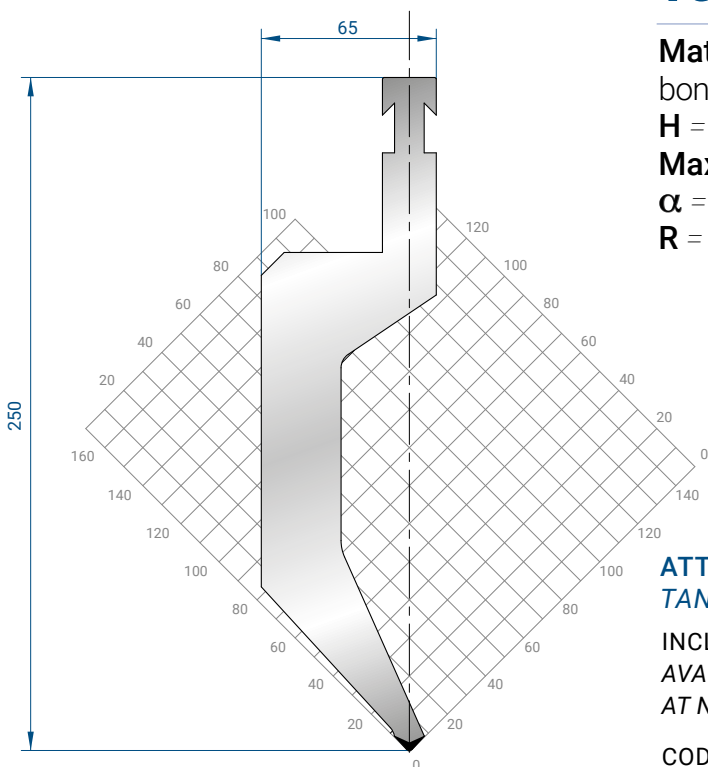

### 1321

**Mat** = 42 CrMo4  
 bonificato / *tempered*  
**H** = 250.00  
**Max T/m** = 100  
 $\alpha$  = 85°  
**R** = 1.5

500 mm	27,9 kg
1100 mm FRAZ. / SECT.	61,0 kg
100 mm	5,6 kg

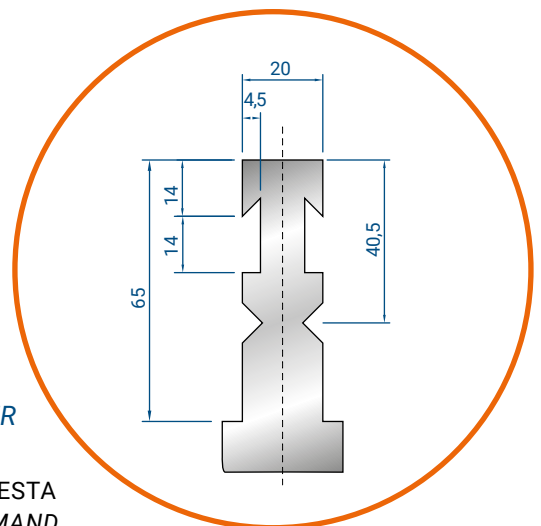

**ATTACCO / UPPER TANG RF-A**

INCLUSO SU RICHIESTA  
 AVAILABLE ON DEMAND  
 AT NO COST



CODICE / CODE **8022**



## 1299

**Mat** = 42 CrMo4  
 bonificato / *tempered*  
**H** = 250.00  
**Max T/m** = 80  
 $\alpha$  = 30°  
**R** = 1

500 mm	13,3 kg
1100 mm FRAZ. / SECT.	29,2 kg
100 mm	2,6 kg

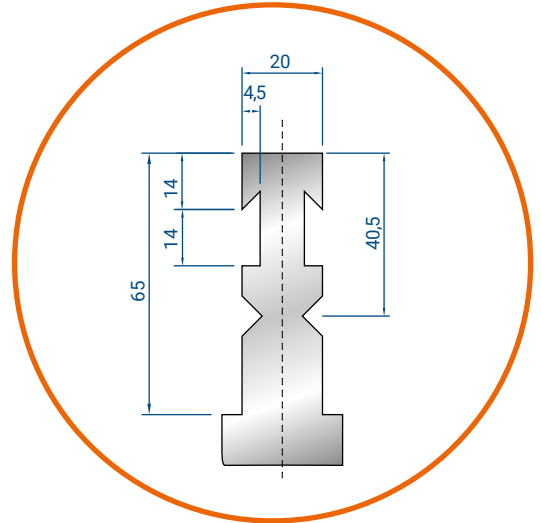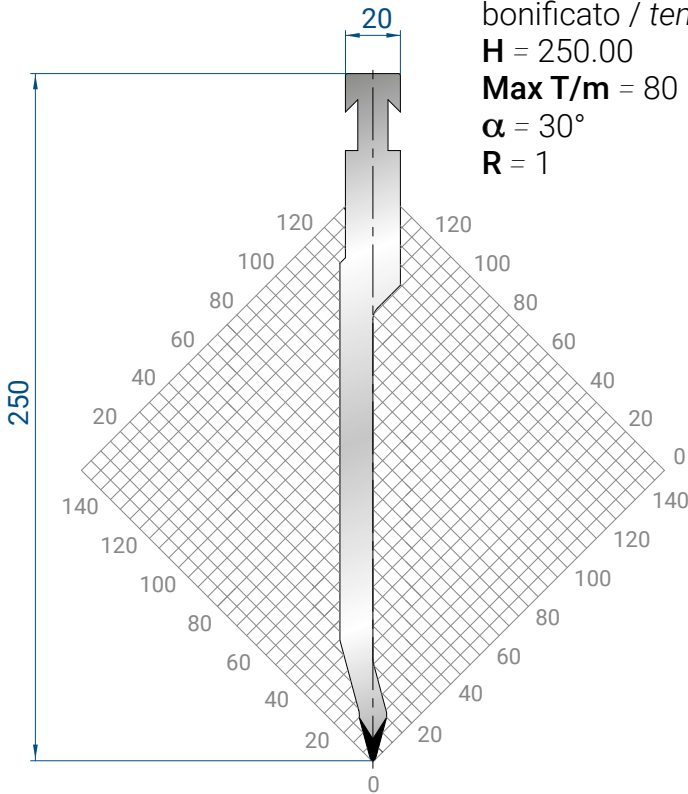

**ATTACCO / UPPER TANG RF-A**



INCLUSO SU RICHIESTA  
 AVAILABLE ON DEMAND  
 AT NO COST

**CODICE / CODE 8022**

## 1300

**Mat** = 42CrMo4  
 bonificato / *tempered*  
**H** = 250.00  
**Max T/m** = 120  
 $\alpha$  = 30°  
**R** = 3


500 mm	21,0 kg
1100 mm FRAZ. / SECT.	46,0 kg
100 mm	4,2 kg

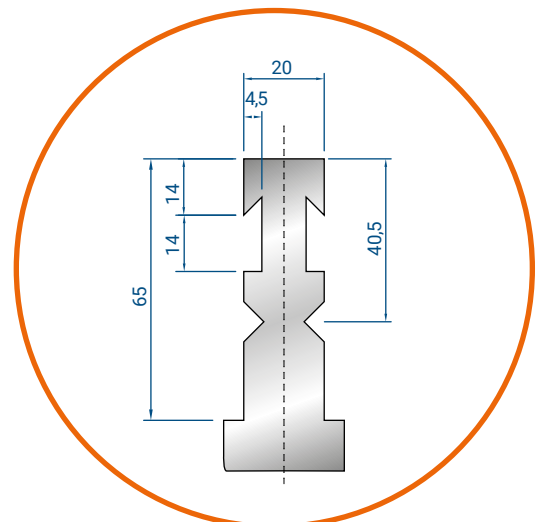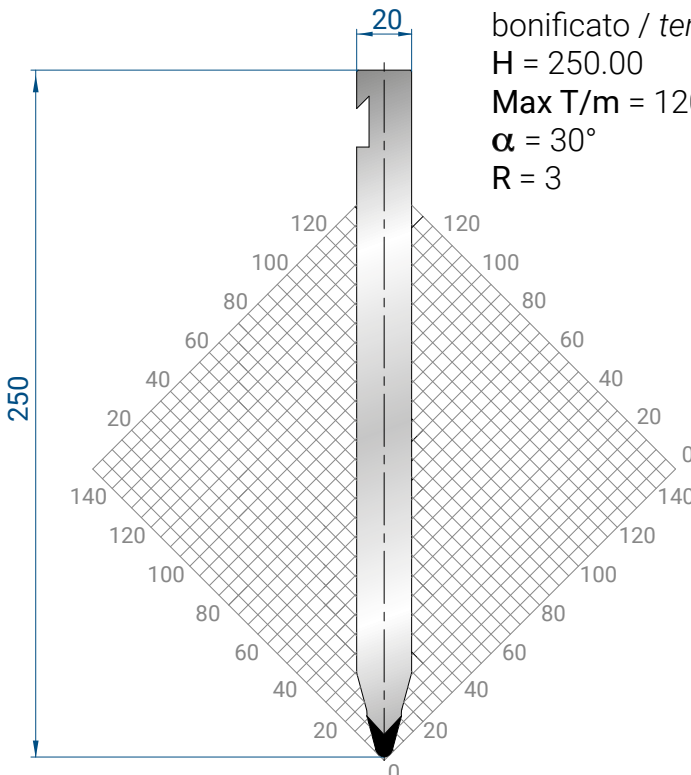

**ATTACCO / UPPER TANG RF-A**

INCLUSO SU RICHIESTA  
 AVAILABLE ON DEMAND  
 AT NO COST


**CODICE / CODE 8022**

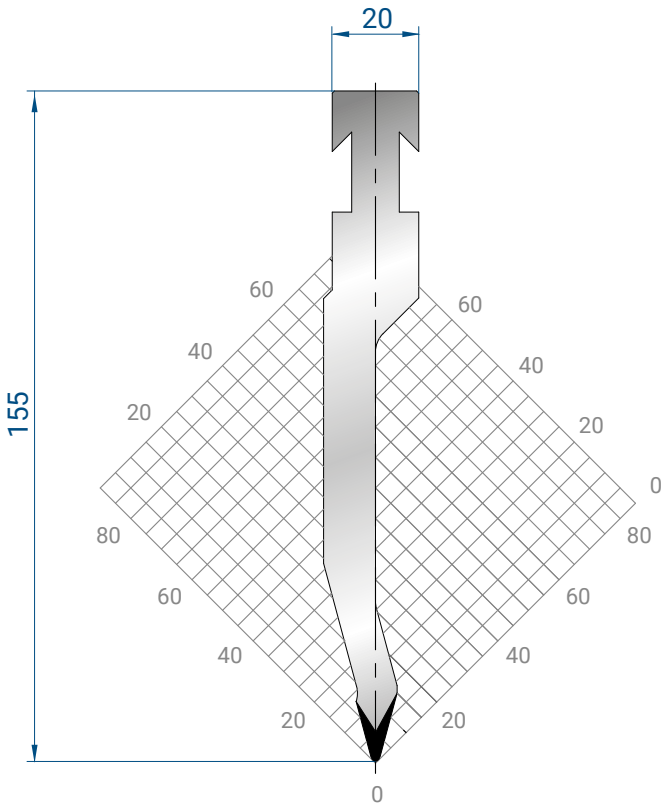

### 1220

Mat = C45  
 bonificato / *tempered*  
 H = 155.00  
 Max T/m = 80  
 $\alpha = 30^\circ$   
 R = 1


1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

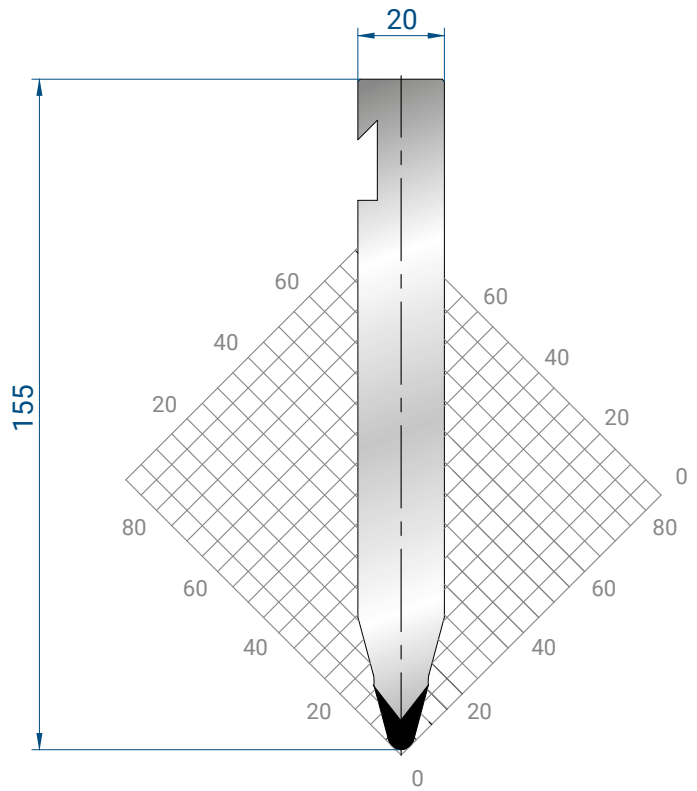

### 1225

Mat = C45  
 bonificato / *tempered*  
 H = 155.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 3


1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

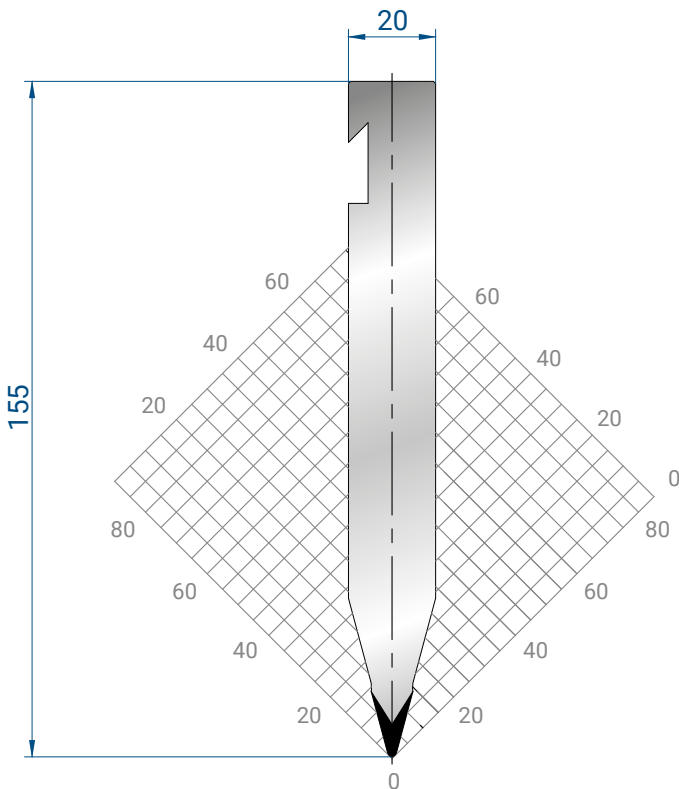

### 1226

Mat = C45  
 bonificato / *tempered*  
 H = 155.00  
 Max T/m = 100  
 $\alpha = 30^\circ$   
 R = 1

1000 mm	21,0 kg
500 mm	10,0 kg
1100 mm FRAZ. / SECT.	21,0 kg
100 mm	2,0 kg

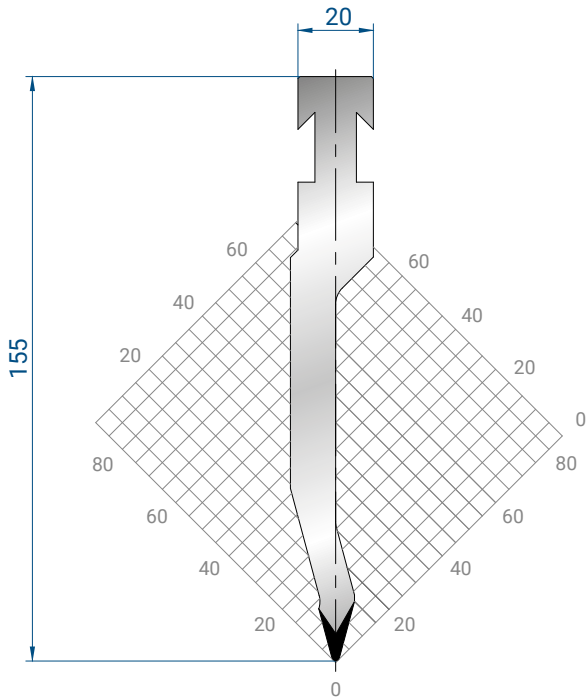


## 1221

Mat = C45  
 bonificato / *tempered*  
 H = 155.00  
 Max T/m = 80  
 $\alpha = 28^\circ$   
 R = 1


1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm	16,0 kg
100 mm FRAZ. / SECT.	1,6 kg



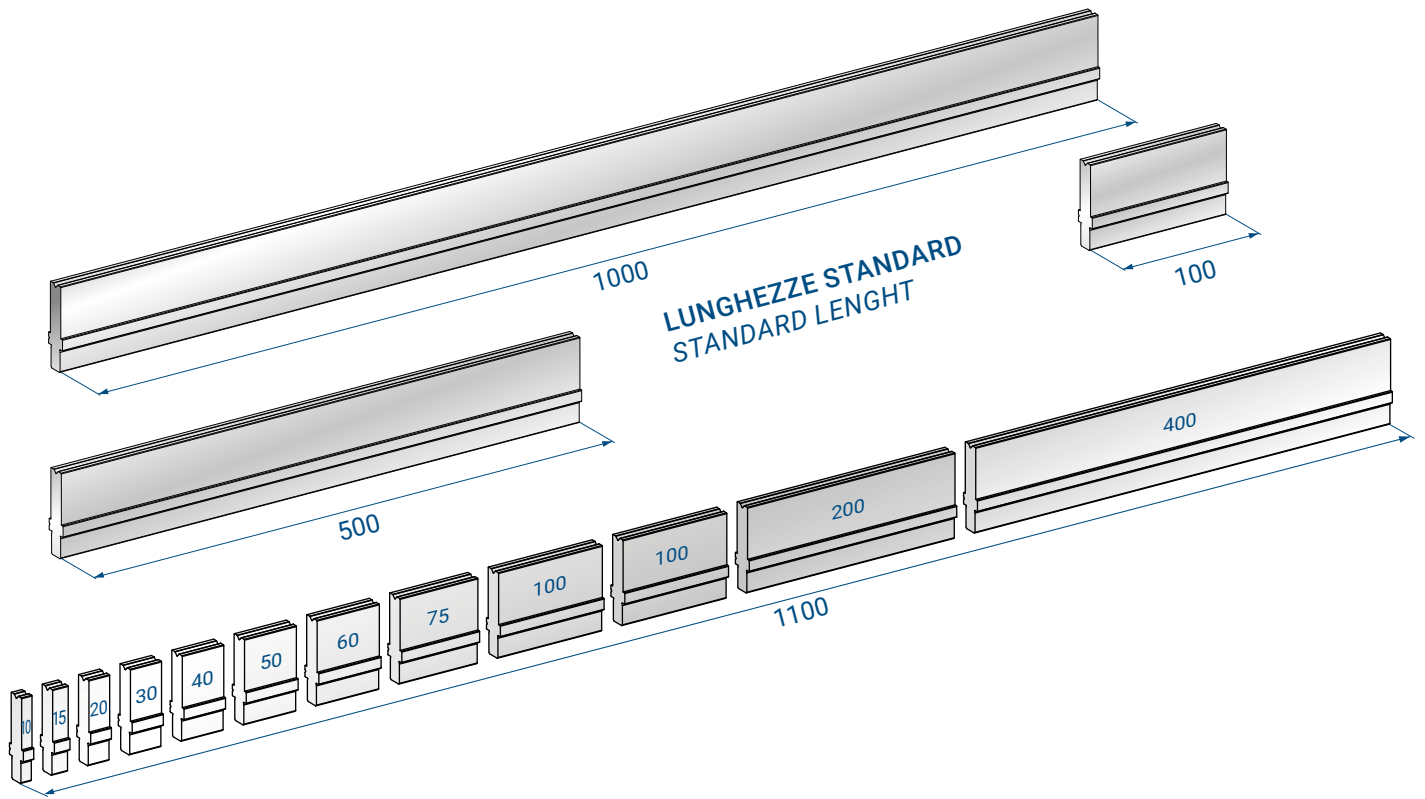


MODIFICHE A RICHIESTA / MODIFICATIONS ON REQUEST


TAGLI A RICHIESTA  
SPECIAL SEGMENTATION

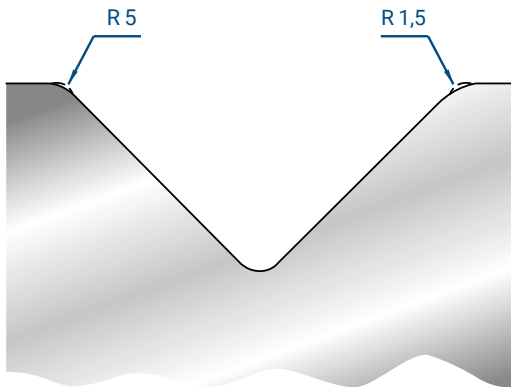

MODIFICA RAGGIO  
RADIUS MODIFICATION

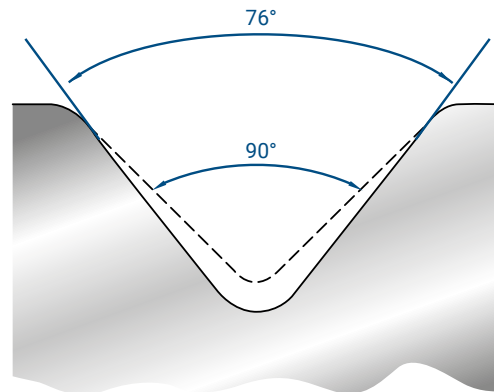


MODIFICA ANGOLO  
ANGLE MODIFICATION

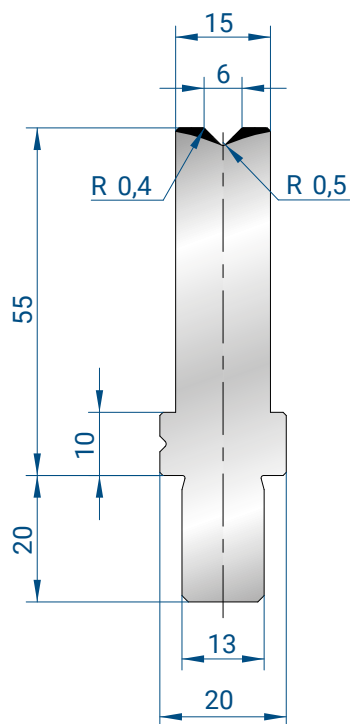

### 3241

Mat = C45  
 Max T/m = 100  
 $\alpha = 88^\circ$


1000 mm	8,0 kg
500 mm	4,0 kg
1100 mm FRAZ. / SECT.	8,0 kg
100 mm	0,8 kg

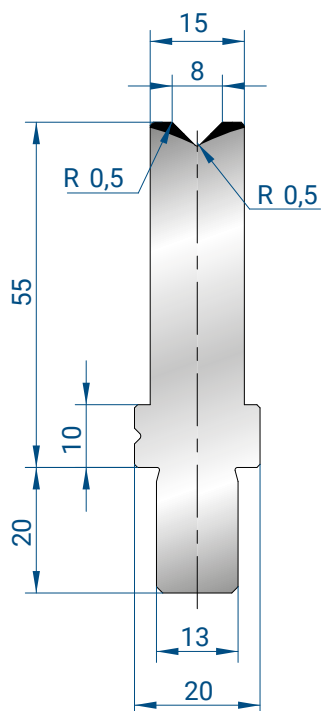

### 3242

Mat = C45  
 Max T/m = 100  
 $\alpha = 88^\circ$

1000 mm	9,0 kg
500 mm	4,0 kg
1100 mm FRAZ. / SECT.	9,0 kg
100 mm	0,8 kg

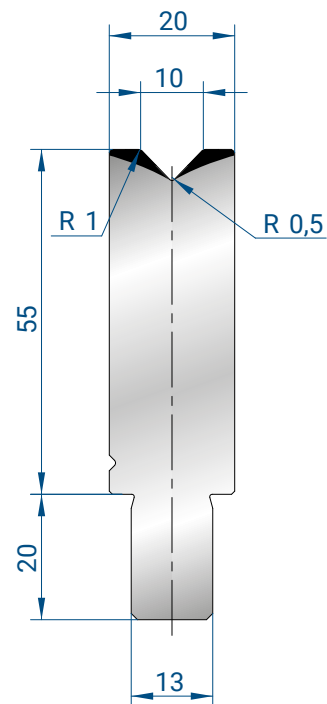


### 3106

Mat = C45  
 Max T/m = 100  
 $\alpha = 88^\circ$

1000 mm	10,0 kg
500 mm	5,0 kg
1100 mm FRAZ. / SECT.	10,0 kg
100 mm	1,0 kg




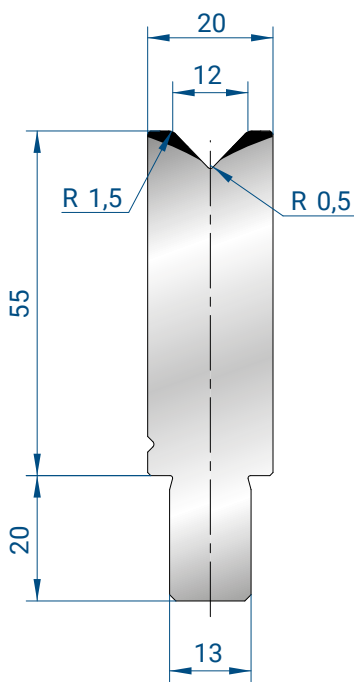

### 3107

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


1000 mm	10,0 kg
500 mm	5,0 kg
1100 mm FRAZ. / SECT.	10,0 kg
100 mm	1,0 kg

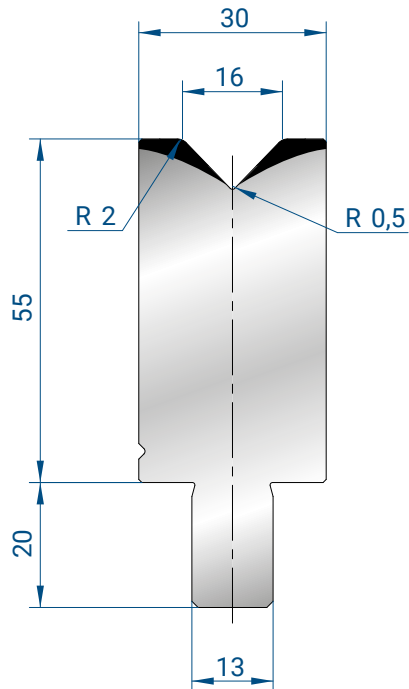

### 3108

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


1000 mm	14,0 kg
500 mm	7,0 kg
1100 mm FRAZ. / SECT.	14,0 kg
100 mm	1,4 kg

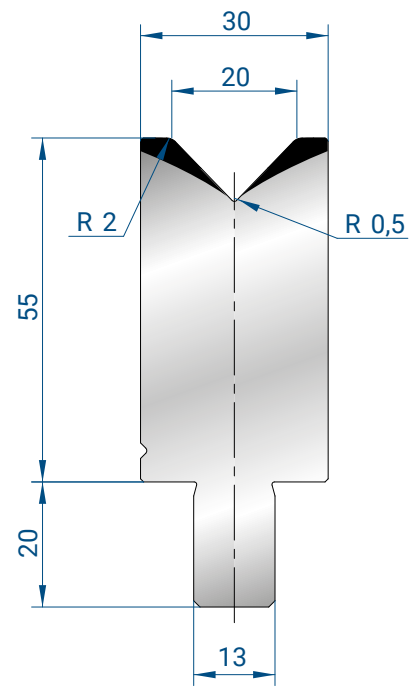

### 3109

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


1000 mm	14,0 kg
500 mm	7,0 kg
1100 mm FRAZ. / SECT.	14,0 kg
100 mm	1,4 kg

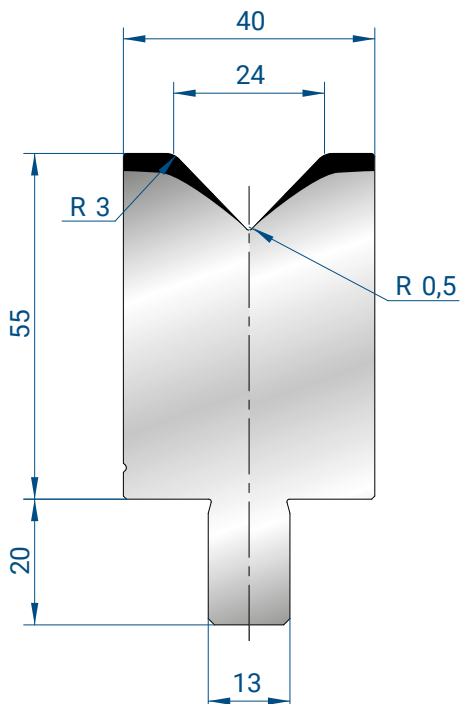

### 3110

Mat = C45  
Max T/m = 100  
 $\alpha = 88^\circ$


1000 mm	18,0 kg
500 mm	9,0 kg
1100 mm FRAZ. / SECT.	18,0 kg
100 mm	1,8 kg

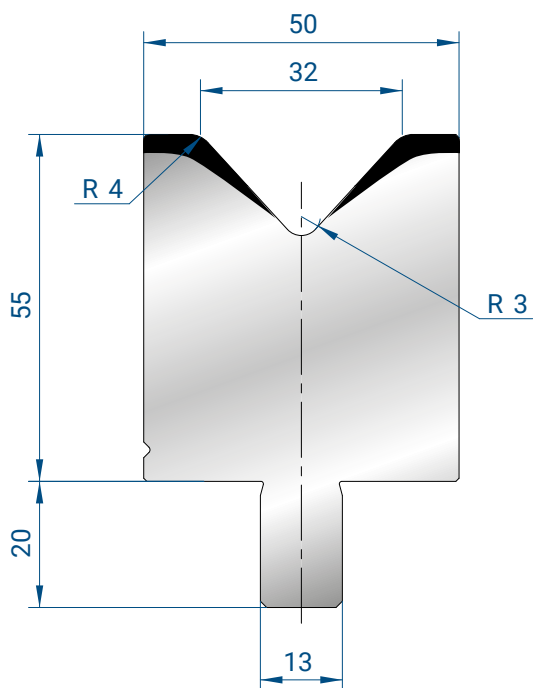

### 3111

Mat = C45  
 Max T/m = 100  
 $\alpha = 85^\circ$


1000 mm	21,0 kg
500 mm	10,0 kg
1100 mm FRAZ. / SECT.	21,0 kg
100mm	2,0 kg

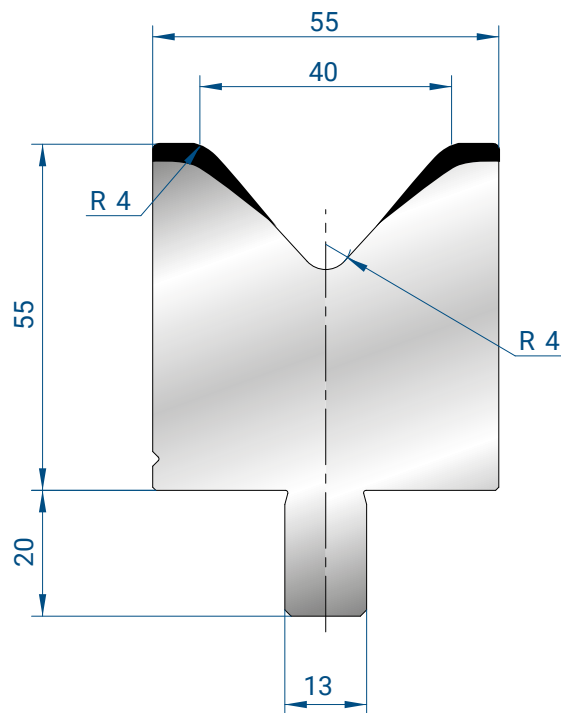


### 3112

Mat = C45  
 Max T/m = 100  
 $\alpha = 85^\circ$

1000 mm	21,0 kg
500 mm	10,0 kg
1100 mm FRAZ. / SECT.	21,0 kg
100mm	2,0 kg

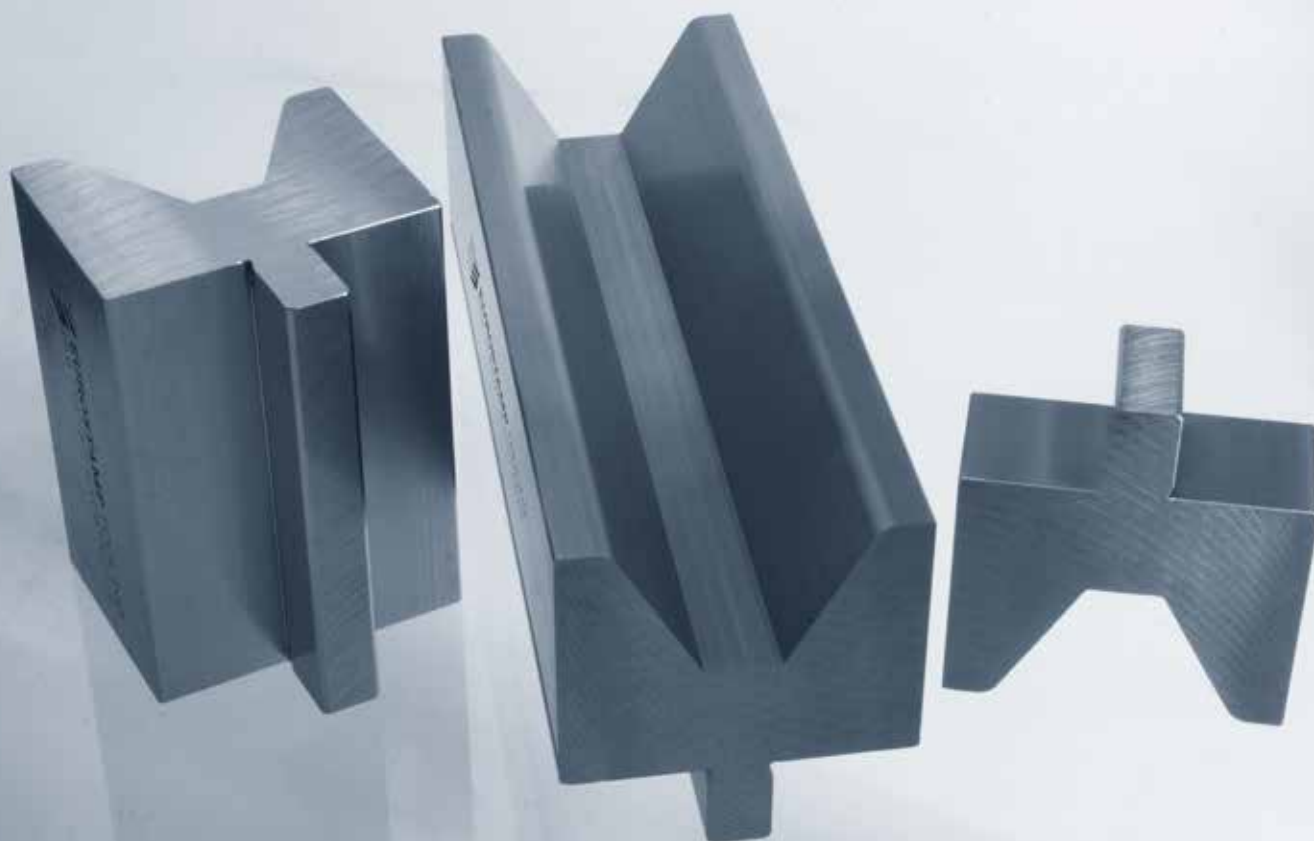


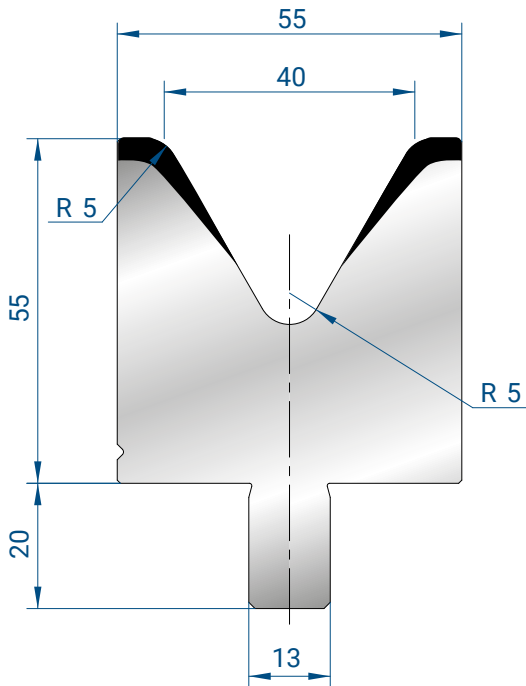

### 3113

Mat = C45  
 Max T/m = 100  
 $\alpha = 60^\circ$


1000 mm	20,0 kg
500 mm	10,0 kg
1100 mm FRAZ. / SECT.	20,0 kg
100mm	2,0 kg

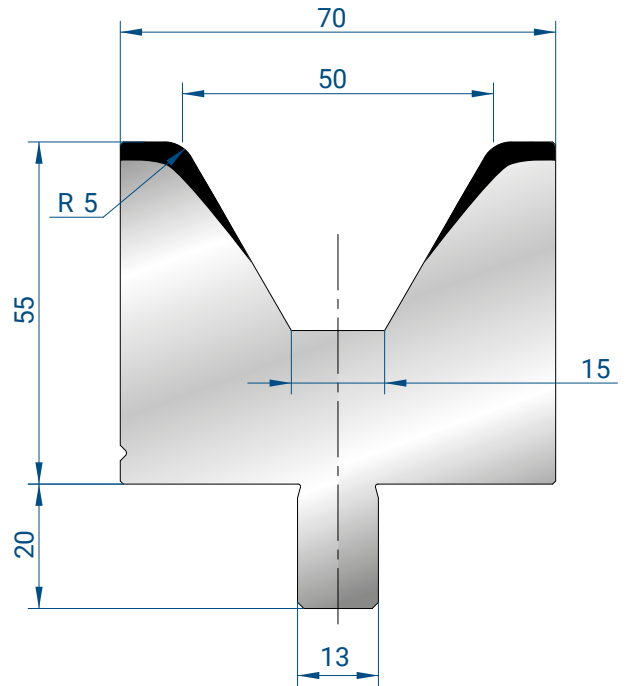

### 3179

Mat = C45  
 Max T/m = 100  
 $\alpha = 60^\circ$

1000 mm	24,0 kg
500 mm	12,0 kg
1100 mm FRAZ. / SECT.	24,0 kg
100mm	2,4 kg

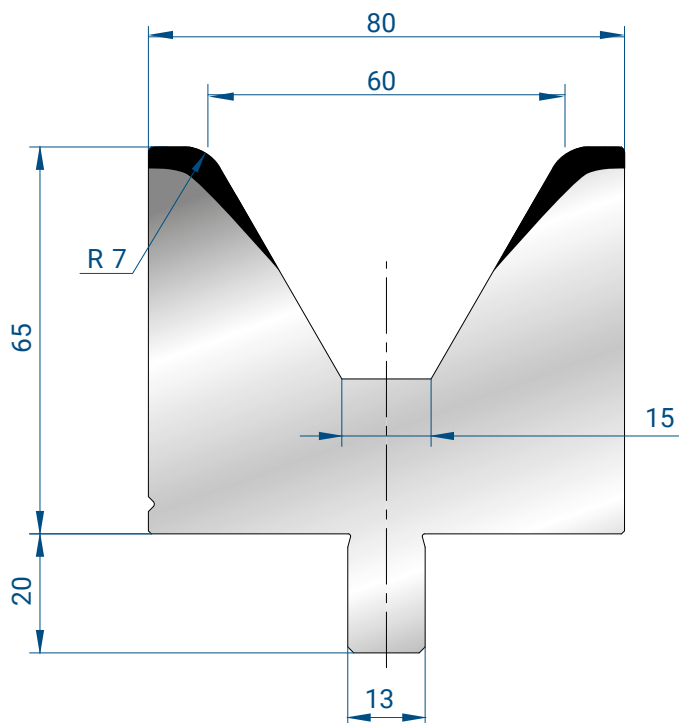


### 3114

Mat = C45  
 Max T/m = 100  
 $\alpha = 60^\circ$

1000 mm	31,0 kg
500 mm	15,0 kg
1100 mm FRAZ. / SECT.	31,0 kg
100mm	3,0 kg




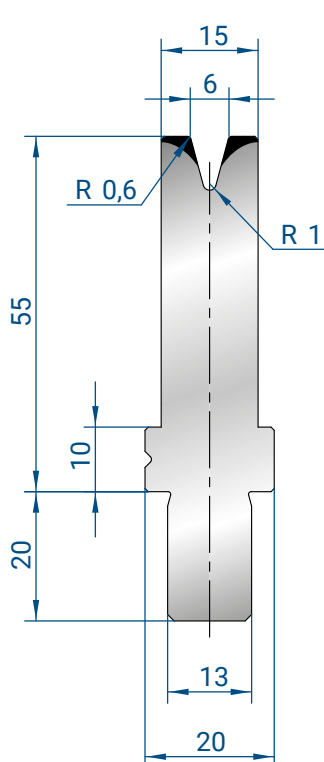

### 3115

Mat = C45  
 Max T/m = 35  
 $\alpha = 30^\circ$


1000 mm	8,0 kg
500 mm	4,0 kg
1100 mm	8,0 kg
FRAZ. / SECT.	
100 mm	0,8 kg

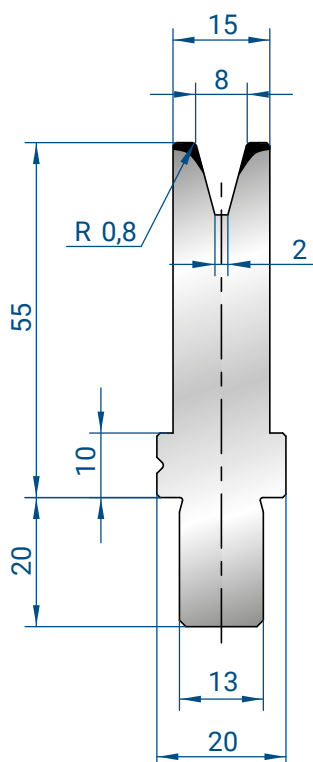

### 3116

Mat = C45  
 Max T/m = 40  
 $\alpha = 30^\circ$


1000 mm	8,0 kg
500 mm	4,0 kg
1100 mm	8,0 kg
FRAZ. / SECT.	
100 mm	0,8 kg

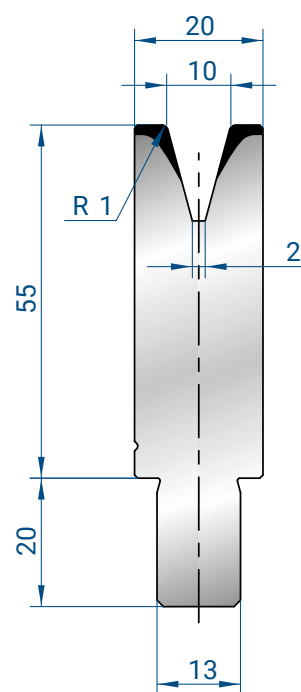


### 3117

Mat = C45  
 Max T/m = 50  
 $\alpha = 30^\circ$

1000 mm	10,0 kg
500 mm	5,0 kg
1100 mm	10,0 kg
FRAZ. / SECT.	
100 mm	2,5 kg

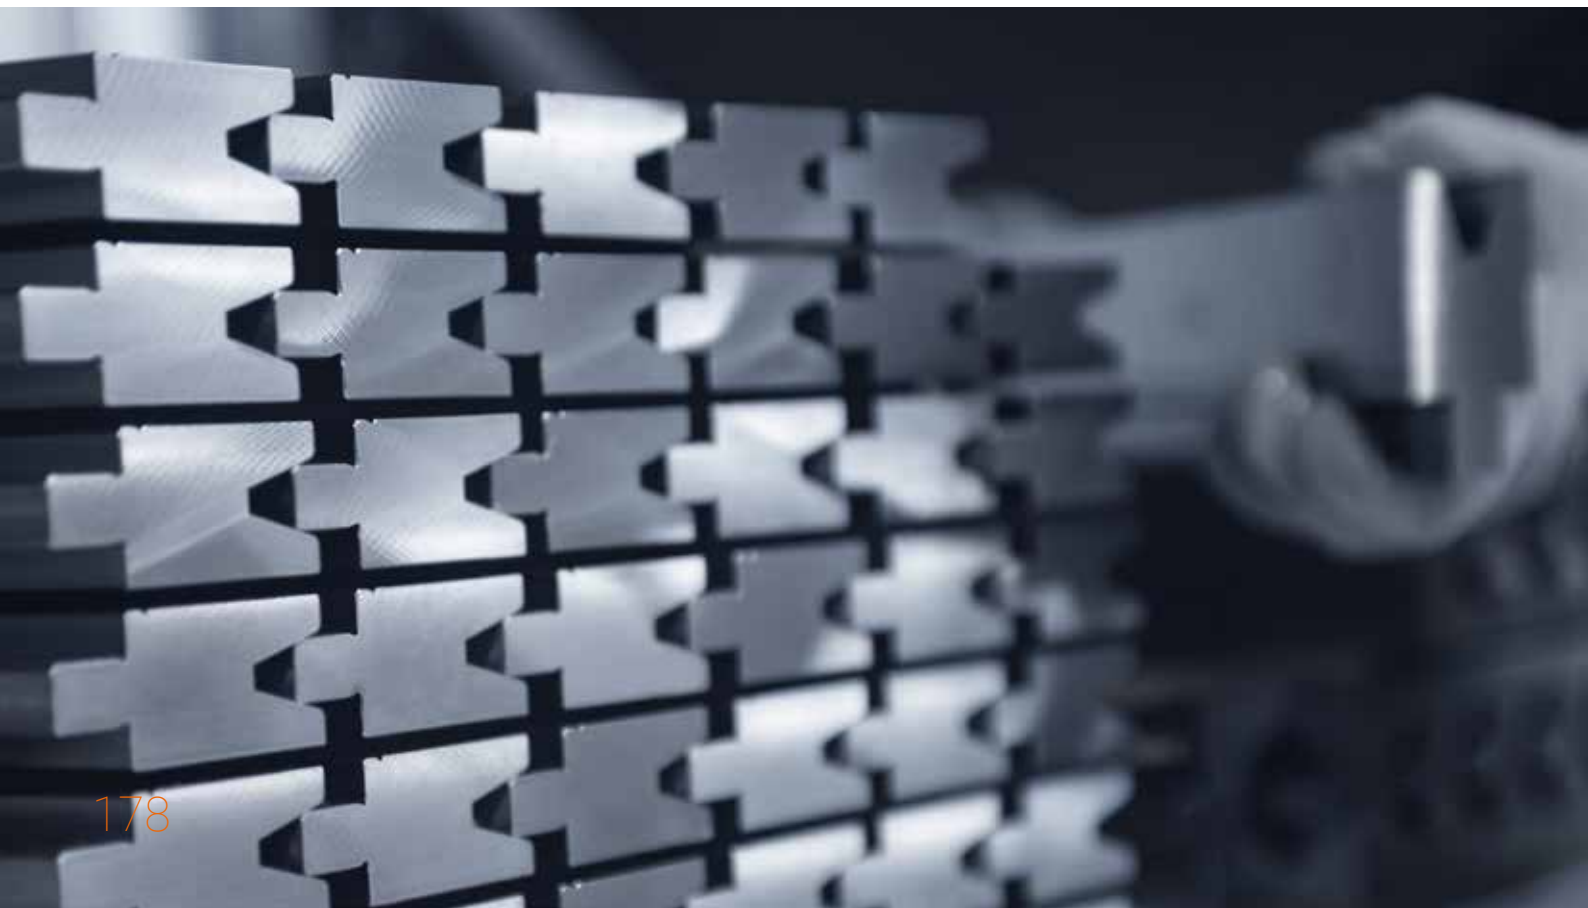


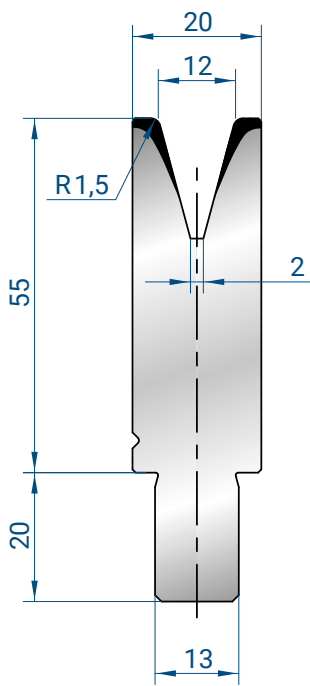

### 3118

Mat = C45  
Max T/m = 40  
 $\alpha = 30^\circ$


1000 mm	10,0 kg
500 mm	5,0 kg
1100 mm FRAZ. / SECT.	10,0 kg
100 mm	2,5 kg

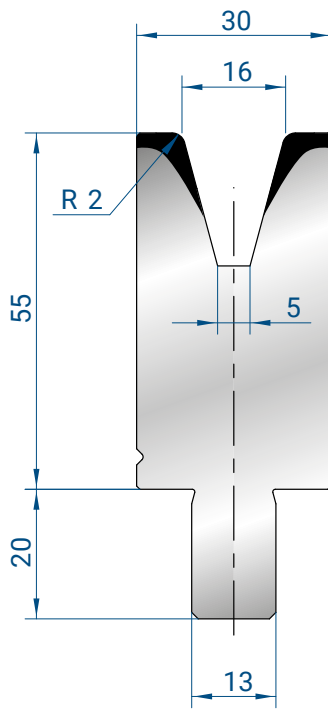

### 3119

Mat = C45  
Max T/m = 50  
 $\alpha = 30^\circ$


1000 mm	13,0 kg
500 mm	6,0 kg
1100 mm FRAZ. / SECT.	13,0 kg
100 mm	1,2 kg

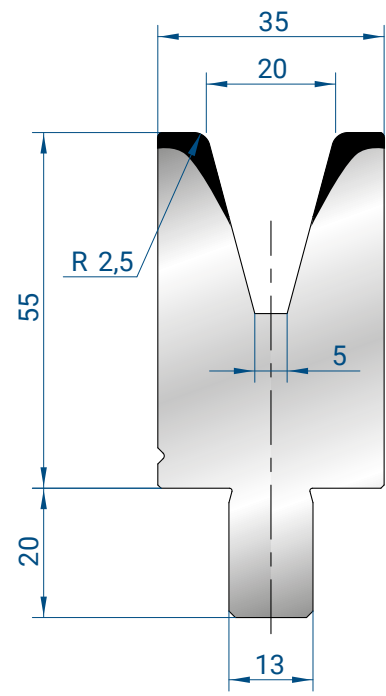

### 3120

Mat = C45  
Max T/m = 55  
 $\alpha = 30^\circ$

1000 mm	14,0 kg
500 mm	7,0 kg
1100 mm FRAZ. / SECT.	14,0 kg
100 mm	1,4 kg

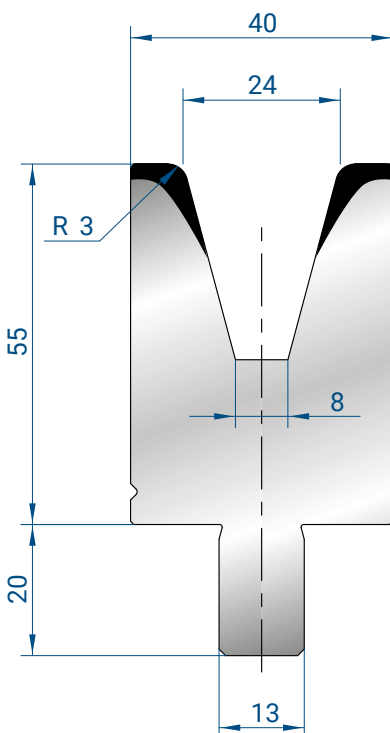

### 3121


Mat = C45  
Max T/m = 65  
 $\alpha = 30^\circ$


1000 mm	15,0 kg
500 mm	7,0 kg
1100 mm FRAZ. / SECT.	15,0 kg
100 mm	1,4 kg

### 3122

Mat = C45  
Max T/m = 65  
 $\alpha = 30^\circ$

1000 mm	23,0 kg
500 mm	11,0 kg
1100 mm FRAZ. / SECT.	23,0 kg
100 mm	2,2 kg

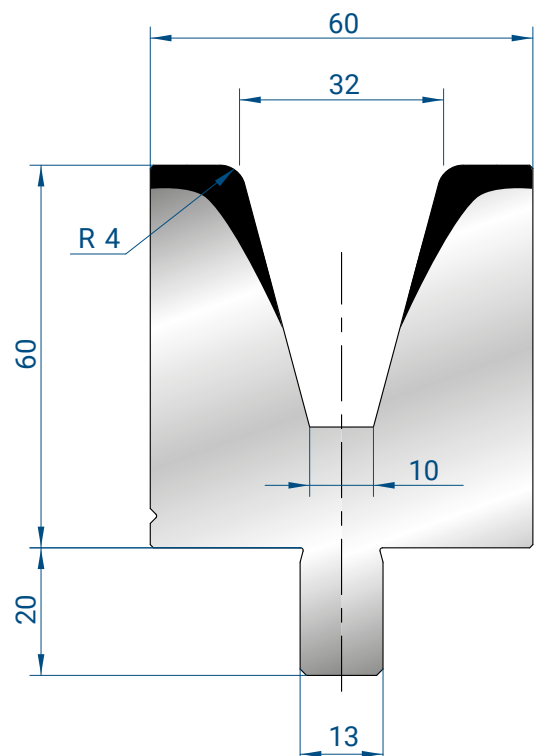

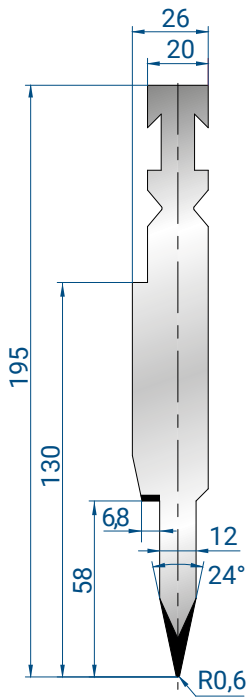


### 1254

**Mat** = C45  
bonificato / tempered  
**Max T/m** = 80

500 mm	14,0 kg
1100 mm FRAZ. / SECT.	14,0 kg
100 mm	2,8 kg

#### Spessore / Thickness

Max 1,5 mm  
Ferro / Mild steel

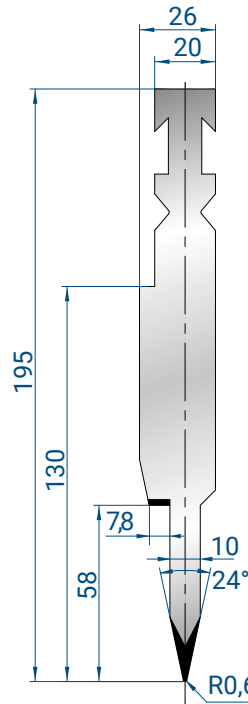


### 1253

**Mat** = C45  
bonificato / tempered  
**Max T/m** = 80

500 mm	13,0 kg
1100 mm FRAZ. / SECT.	13,0 kg
100 mm	2,6 kg

#### Spessore / Thickness


Max 1,5 mm  
Ferro / Mild steel

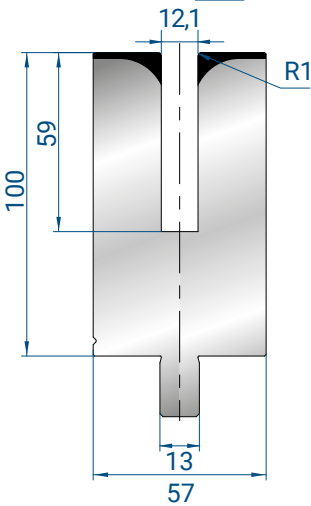

### 3175

**Mat** = C45  
bonificato / tempered  
**Max T/m** = 50

500 mm	20,0 kg
1100 mm FRAZ. / SECT.	20,0 kg
100 mm	4,0 kg

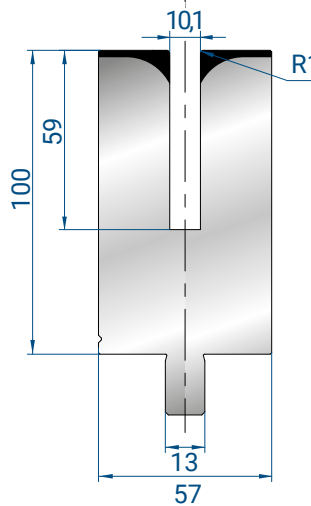


### 3174

**Mat** = C45  
bonificato / tempered  
**Max T/m** = 50

500 mm	20,0 kg
1100 mm FRAZ. / SECT.	20,0 kg
100 mm	4,0kg



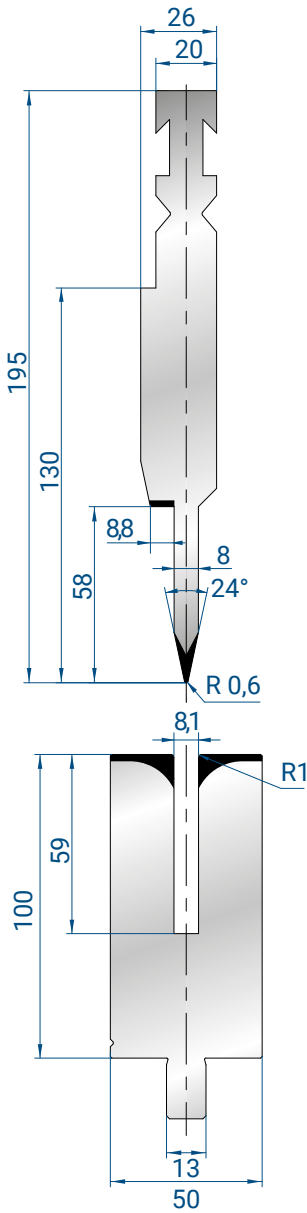


## 1252

**Mat** = C45  
 bonificato / tempered  
**Max T/m** = 80

500 mm	13,0 kg
1100 mm FRAZ. / SECT.	13,0 kg
100 mm	2,6 kg

### Spessore / Thickness

Max 1,2 mm  
 Ferro / Mild steel

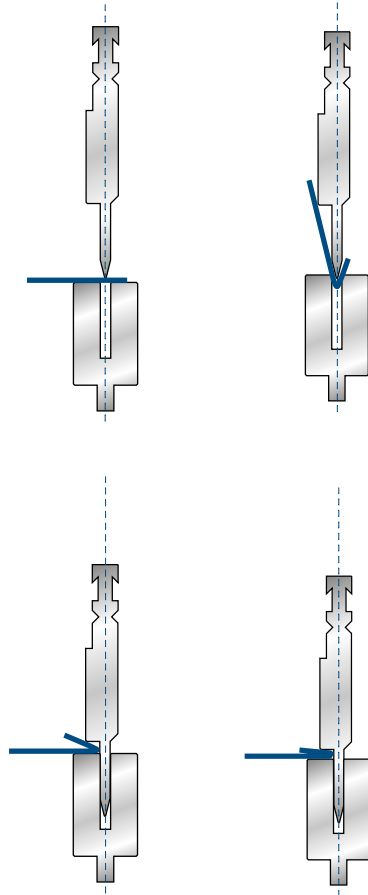

## 3157

**Mat** = C45  
 bonificato / tempered  
**Max T/m** = 50

500 mm	21,0 kg
1100 mm FRAZ. / SECT.	21,0 kg
100 mm	4,2 kg

